

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER



ACTIVE SAFETY



OSAS



USAS



OPAS

The new code will be supplied only when the old will be out of stock.




easu MANIFOLD p. 211

* F_{1i} = Isothermal end force at 100% Cu p. 16
 ** F_{1p} = Polytrophic end force at 100% Cu

CODE PHASING OUT from 01/2018	NEW	Cu		L		L min		F ₀ Initial force		F _{1i} * End force *		F _{1p} ** End force **		V ₀		Maintenance kit See Tab below		
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	
H 700 - 010 - C	H 700 - 010 - D	10	0.39	105	4.13	95	3.74	740 1664 ± 5%	150 bar 2175 psi	811	1823	876	1969	63,0	3.84	0,90	1.98	✓
H 700 - 013 - C	H 700 - 013 - D	13	0.50	110,7	4.35	97,7	3.85			830	1866	904	2032	67,0	4.09	0,91	2.01	✓
H 700 - 025 - C	H 700 - 025 - D	25	0.98	135	5.31	110	4.33			893	2008	995	2237	82,0	5.00	1,00	2.20	✓
H 700 - 038 - C	H 700 - 038 - D	38	1.50	161	6.34	123	4.84			945	2124	1073	2412	99,0	6.04	1,09	2.40	✓
H 700 - 050 - C	H 700 - 050 - D	50	1.97	185	7.28	135	5.31			983	2210	1131	2543	114,0	6.95	1,17	2.58	✓
H 700 - 063 - C	H 700 - 063 - D	63	2.48	211,5	8.33	148,5	5.85			1014	2280	1179	2650	131,0	7.99	1,26	2.78	✓
H 700 - 080 - C	H 700 - 080 - D	80	3.15	245	9.65	165	6.50			1050	2360	1235	2776	152,0	9.27	1,37	3.02	✓
H 700 - 100 - C	H 700 - 100 - D	100	3.94	285	11.22	185	7.28			1228	2761	1520	3418	140,0	8.54	1,51	3.33	✓
H 700 - 125 - C	H 700 - 125 - D	125	4.92	335	13.19	210	8.27			1244	2796	1546	3475	172,0	10.49	1,67	3.68	✓
H 700 - 160 - C	H 700 - 160 - D	160	6.30	405	15.94	245	9.65			1258	2827	1569	3527	217,0	13.24	1,91	4.21	✓

Model (Cu)	Rev.	Maintenance kit
H 700 (010 ÷ 080)	C	39BMRV00750B
H 700 (100 ÷ 160)	C	39BMH00700C
H 700 (010 ÷ 160)	D	39BMH00700D

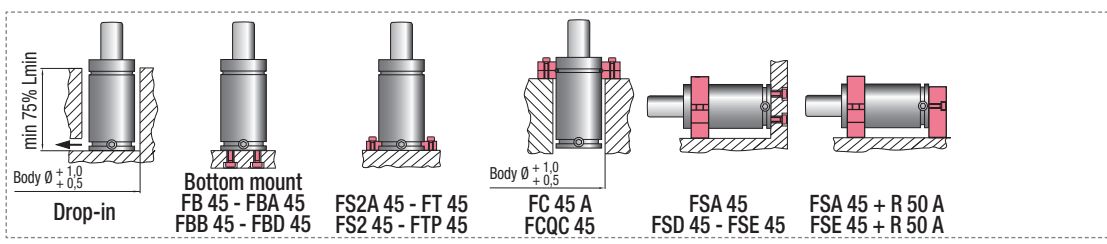

HOW TO ORDER

(10 pcs) H 700-050-C
 (10 pcs) H 700-050-C-N