


HP D STATION WILSON STYLE

Cat. No. 5524 — Guide Unit Assembly includes:

1, 2, 3, 4, 5, 6, 8, & 9

Cat. No. 5725 — Driver Assembly includes:

18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29 & 30

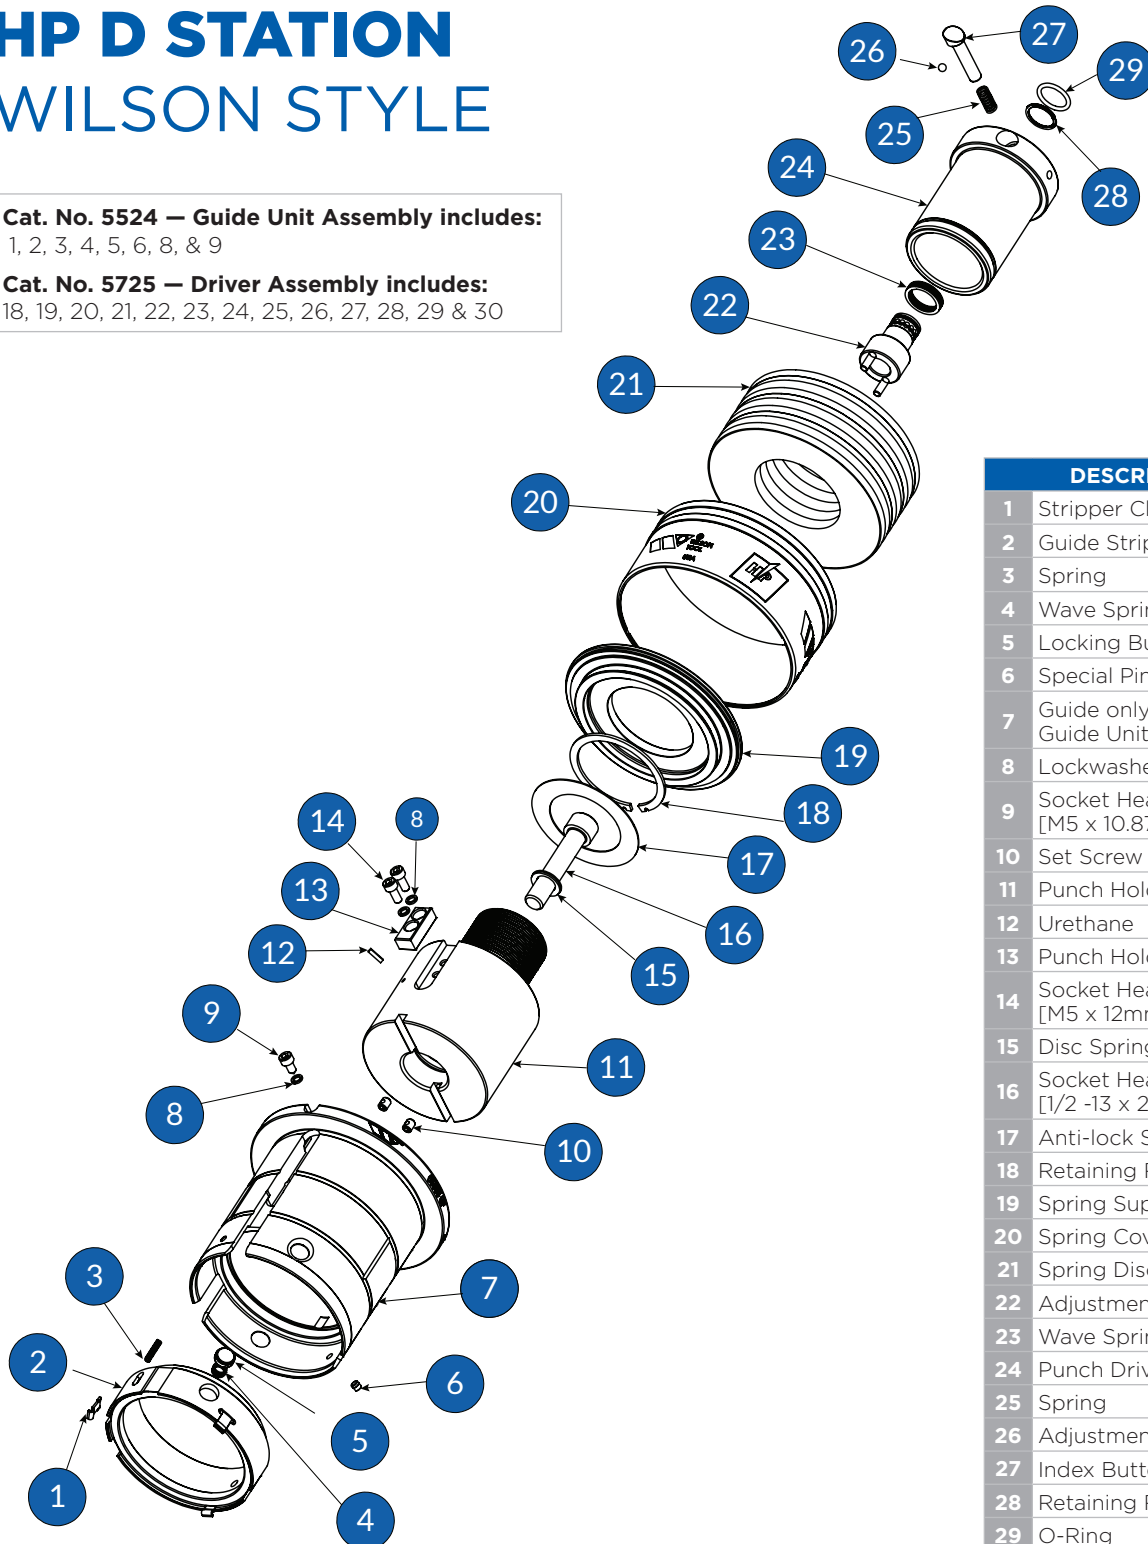

| | DESCRIPTION | CAT. NO. |
|----|---|--------------|
| 1 | Stripper Clip | 5521 |
| 2 | Guide Stripper Ring | 5528 |
| 3 | Spring | 971694 |
| 4 | Wave Spring | 8155 |
| 5 | Locking Button | 5519 |
| 6 | Special Pin | 5522 |
| 7 | Guide only Guide Unit Assembly | 5527 5524 |
| 8 | Lockwasher | 2112 |
| 9 | Socket Head Cap Screw [M5 x 10.87mm] | 5197 |
| 10 | Set Screw | 6298 |
| 11 | Punch Holder | 5525 |
| 12 | Urethane | 2020643 |
| 13 | Punch Holder Key | 1862 |
| 14 | Socket Head Cap Screw [M5 x 12mm] | 6110 |
| 15 | Disc Spring | 971690 |
| 16 | Socket Head Cap Screw [1/2 -13 x 2.500"] | 6566 |
| 17 | Anti-lock Shim | 5413 |
| 18 | Retaining Ring | 5747 |
| 19 | Spring Support | 5738 |
| 20 | Spring Cover | 5561 |
| 21 | Spring Disc (7 required) | 5449 |
| 22 | Adjustment Shaft | 5739 |
| 23 | Wave Spring | 971692 |
| 24 | Punch Driver | 5740 |
| 25 | Spring | 972396 |
| 26 | Adjustment Locking Ball | 972420 |
| 27 | Index Button | 5737 |
| 28 | Retaining Ring | 972441 |
| 29 | O-Ring | 972430 |