

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird geliefert nur wenn der alte nicht mehr im Lager ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando el viejo está fuera de stock

O novo código irá ser fornecido apenas quando o antigo esgotar stock

ACTIVE SAFETY



OSAS



USAS

* $F_{1i} =$

Isothermal end force at 100% Cu






p. 16




** $F_{1p} =$

Polytropic end force at 100% Cu

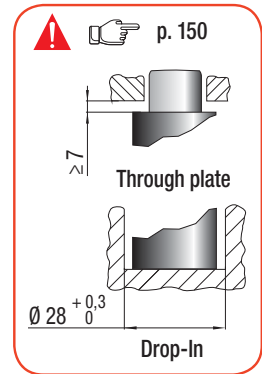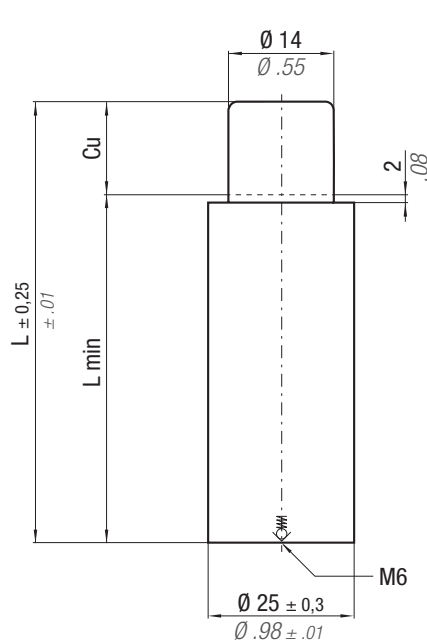

N ₂		°F 32 - 176	°C 0 - 80	ΔP ± 0,33 %/°C	P max 200 bar 2900 psi	P min 20 bar 290 psi	S 1,54 cm ² 0.239 in ²	SPM ~ 40 - 80 (at 20°C)	Max Speed 1,6 m/s	Maintenance kit Disposable								
CODE	NEW	Cu		L		L min		F ₀	F _{1i} *		F _{1p} **		V ₀		PED 2014/68/EU			
PHASING OUT from 04/2013		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³		in ³	~Kg	~lb
ML 300 - 010 - B	ML 300 - 010 - C	10	0.39	75	2.95	65	2.56	310	697	424	954	476	1070	7,0	0.43	0,17	0.37	✓
ML 300 - 015 - B	ML 300 - 015 - C	15	0.59	85	3.35	70	2.76			460	1034	524	1178	9,0	0.55	0,18	0.40	✓
ML 300 - 025 - B	ML 300 - 025 - C	25	0.98	105	4.13	80	3.15	200 bar 2900 psi	± 5%	509	1143	592	1331	12,0	0.73	0,21	0.46	✓
ML 300 - 038 - B	ML 300 - 038 - C	38	1.50	130	5.12	92	3.62			555	1248	658	1479	16,0	0.98	0,24	0.53	✓
ML 300 - 050 - B	ML 300 - 050 - C	50	1.97	155	6.10	105	4.13	572	1286	682	1533	20,0	1.22	0,27	0.60	✓		
ML 300 - 063 - B	ML 300 - 063 - C	63	2.48	185	7.28	122	4.80	569	1279	678	1524	26,0	1.59	0,31	0.68	✓		
ML 300 - 080 - B	ML 300 - 080 - C	80	3.15	220	8.66	140	5.51	+20 °C	+68 °F	584	1313	699	1571	32,0	1.95	0,35	0.77	✓



Drop-In



Bottom mount



HOW TO ORDER

(10 pcs) ML300-050-C