

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird geliefert nur wenn der alte nicht mehr im Lager ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando el viejo está fuera de stock

O novo código irá ser fornecido apenas quando o antigo esgotar stock

**ACTIVE SAFETY**



OSAS



USAS

\*  $F_{1i} =$

Isothermal end force at 100% Cu



p. 16




\*\*  $F_{1p} =$

Polytrophic end force at 100% Cu

N <sub>2</sub>	°F 32 - 176	°C 0 - 80	ΔP ± 0,33 %/°C	P max 200 bar 2900 psi	P min 20 bar 290 psi	S 2,54 cm <sup>2</sup> 0.394 in <sup>2</sup>	SPM ~ 40 - 80 (at 20°C)	Max Speed 1,6 m/s	Maintenance kit Disposable	CODE		Cu	L		L min		F <sub>0</sub>		F <sub>1i</sub> *		F <sub>1p</sub> **		V <sub>0</sub>		Maintenance kit		PED 2014/68/EU	
										PHASING OUT from 04/2013	NEW		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm <sup>3</sup>	in <sup>3</sup>		~Kg
										ML 500 - 010 - B	ML 500 - 010 - C	10	0.39	75	2.95	65	2.56	510	1147	708	1592	796	1789	11,0	0.67	0,28	0,62	✓
										ML 500 - 015 - B	ML 500 - 015 - C	15	0.59	85	3.35	70	2.76	± 5%	763	1715	871	1958	14,0	0.85	0,30	0,66	✓	
										ML 500 - 025 - B	ML 500 - 025 - C	25	0.98	105	4.13	80	3.15		835	1877	971	2183	20,0	1.22	0,34	0,75	✓	
										ML 500 - 038 - B	ML 500 - 038 - C	38	1.50	130	5.12	92	3.62	200 bar	902	2028	1065	2394	27,0	1.65	0,39	0,86	✓	
										ML 500 - 050 - B	ML 500 - 050 - C	50	1.97	155	6.10	105	4.13	2900 psi	923	2075	1095	2462	35,0	2.14	0,43	0,95	✓	
										ML 500 - 063 - B	ML 500 - 063 - C	63	2.48	190	7.48	127	5.00		881	1981	1035	2327	47,0	2.87	0,51	1.12	✓	
										ML 500 - 080 - B	ML 500 - 080 - C	80	3.15	225	8.86	145	5.71	+20 °C +68 °F	904	2032	1069	2403	57,0	3.48	0,57	1.26	✓	

ML

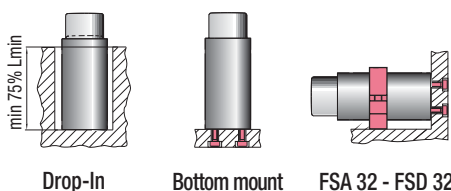

**HOW TO ORDER**

(10 pcs) ML500-050-C