

OSAS + OSM = OVER STROKE SAFETY + OVER STROKE MARKER

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird geliefert nur wenn der alte nicht mehr im Lager ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera épuisé

El nuevo código será suministrado sólo cuando el viejo está fuera de stock

O novo código irá ser fornecido apenas quando o antigo esgotar stock

easu MANIFOLD **p. 211**

*** F_i =**

Isothermal end force at 100% Cu

**** F_p =**

Polytropic end force at 100% Cu



ACTIVE SAFETY




OSAS



USAS




OPAS

 N₂	°F 32 176	°C 0 80	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 70,88 cm ² 10.986 in ²	SPM ~ 15 - 50 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit 39BMS10000D
---	------------------------	----------------------	--------------------------	-------------------------------------	-----------------------------------	---	--------------------------------------	-----------------------------	---------------------------------------

CODE PHASING OUT from 01/2014	NEW	Cu mm inch	L mm inch	L min mm inch	F₀ Initial force daN lb	F_i * End force daN lb	F_p ** End force daN lb	V₀ cm ³ in ³	~Kg	~lb	PED 2014/68/EU
SC 10000 - 025 - C	SC 10000 - 025 - D	25 0.98	210 8.27	185 7.28	10600 23830 ± 5% 150 bar 2175 psi + 20 °C +68 °F	12892 28981	14373 32311	1186,0 72.35	33,73	74.36	✓
SC 10000 - 038 - C	SC 10000 - 038 - D	38 1.50	236 9.29	198 7.80		13463 30267	15225 34228	1497,0 91.32	35,08	77.34	✓
SC 10000 - 050 - C	SC 10000 - 050 - D	50 1.97	260 10.24	210 8.27		13838 31108	15790 35497	1784,0 108.82	36,32	80.07	✓
SC 10000 - 063 - C	SC 10000 - 063 - D	63,5 2.50	287 11.30	223,5 8.80		14151 31812	16266 36567	2108,0 128.59	37,72	83.16	✓
SC 10000 - 080 - C	SC 10000 - 080 - D	80 3.15	320 12.60	240 9.45		14434 32450	16700 37543	2503,0 152.68	39,44	86.95	✓
SC 10000 - 100 - C	SC 10000 - 100 - D	100 3.94	360 14.17	260 10.24		14686 33015	17087 38414	2982,0 181.90	41,51	91.51	✓
SC 10000 - 125 - C	SC 10000 - 125 - D	125 4.92	410 16.14	285 11.22		14912 33524	17438 39202	3581,0 218.44	44,11	97.25	✓
SC 10000 - 160 - C	SC 10000 - 160 - D	160 6.30	480 18.90	320 12.60		15132 34018	17780 39971	4419,0 269.56	47,74	105.25	✓
SC 10000 - 200 - C	SC 10000 - 200 - D	200 7.87	560 22.05	360 14.17		15345 34498	18114 40722	5343,0 325.92	52,17	115.02	✓
SC 10000 - 250 - C	SC 10000 - 250 - D	250 9.84	660 25.98	410 16.14		15696 35286	18665 41961	6348,0 387.23	58,87	129.79	✓
SC 10000 - 300 - C	SC 10000 - 300 - D	300 11.81	760 29.92	460 18.11		15960 35879	19083 42901	7354,0 448.59	65,57	144.56	✓

SC
SCF

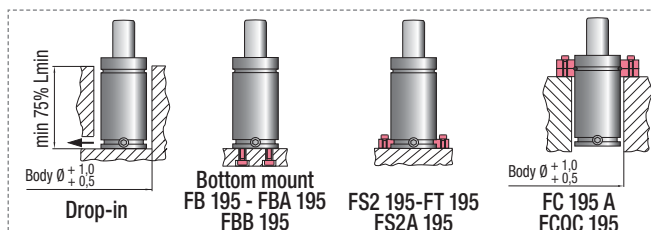

HOW TO ORDER

(10 pcs) SC 10000-050-D
(10 pcs) SC 10000-050-D-N