


ISO 11901 - 1	VDI 3003	B2 4006 (BMW)	075.90.55 (FCA)
W-DX35-6203 (Ford)	PG23D (Mazda)	B8 3180 220 000 001(MB)	K 32 S (Nissan)
E24.54.815.G (PSA)	EM24.54.700 (Renault)	SES-K 5404e (Suzuki)	39D 878 (VW)

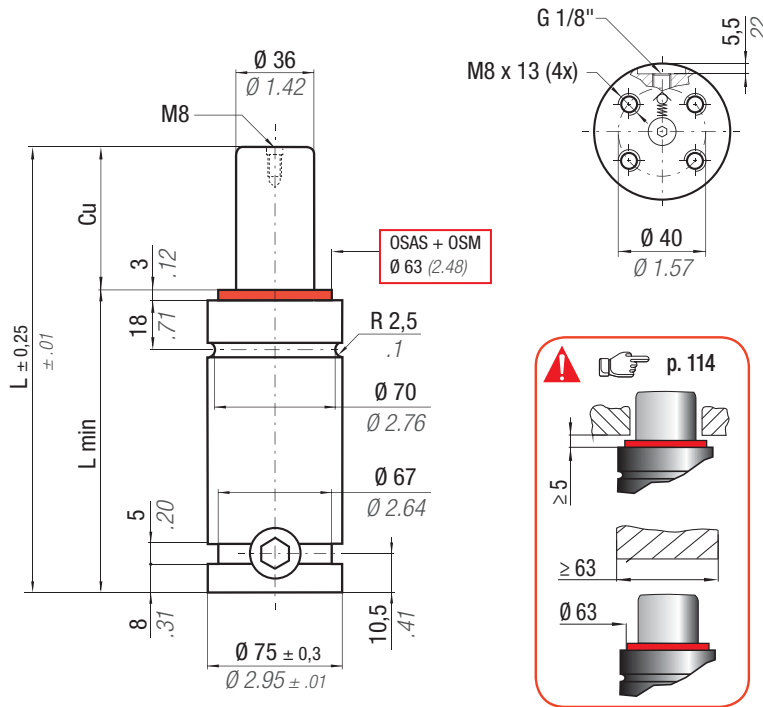

**OSAS + OSM** = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird geliefert nur wenn der alte nicht mehr im Lager ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando el viejo está fuera de stock

O novo código irá ser fornecido apenas quando o antigo esgotar stock

**easu** MANIFOLD p. 211

\*  $F_{1i} =$

Isothermal end force at 100% Cu p. 16

\*\*  $F_{1p} =$

Polytrophic end force at 100% Cu



**ACTIVE SAFETY**



OSAS



USAS




OPAS

	$^{\circ}\text{F}$ 32 - 176	$^{\circ}\text{C}$ 0 - 80	$\Delta\text{P}$ $\pm 0,33\% / ^{\circ}\text{C}$	<b>P max</b> 150 bar 2175 psi	<b>P min</b> 20 bar 290 psi	<b>S</b> 10,18 cm <sup>2</sup> 1.578 in <sup>2</sup>	<b>SPM</b> ~ 15 - 50 (at 20°C)	<b>Max Speed</b> 1,8 m/s	<b>Maintenance kit</b> 39BMSCO1500D Cu 13 ÷ 80 39BMSCO1500DH Cu 88 ÷ 300
--	--------------------------------------	------------------------------------	---	-------------------------------------	-----------------------------------	--	--------------------------------------	-----------------------------	--

CODE	PHASING OUT from 01/2014	NEW	Cu		L		L min		F0		F <sub>1i</sub> *		F <sub>1p</sub> **		V0			2014/68/EU
			mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm <sup>3</sup>	in <sup>3</sup>		
-	SC 1500 - 013 - D	13	0.51	135	5.31	122	4.80			1819	4089	2016	4532	97,0	5.92	3,26	7.19	✓
SC 1500 - 025 - B	SC 1500 - 025 - D	25	0.98	160	6.30	135	5.31			1925	4329	2174	4888	144,0	8.78	3,47	7.65	✓
SC 1500 - 038 - B	SC 1500 - 038 - D	38	1.50	186	7.32	148	5.83			2000	4496	2287	5141	191,0	11.65	3,67	8.09	✓
SC 1500 - 050 - B	SC 1500 - 050 - D	50	1.97	210	8.27	160	6.30			2045	4596	2355	5294	234,0	14.27	3,85	8.49	✓
SC 1500 - 063 - B	SC 1500 - 063 - D	63,5	2.50	237	9.33	173,5	6.83			2080	4675	2409	5415	283,0	17.26	4,05	8.93	✓
-	SC 1500 - 075 - D	75	2.95	260	10.24	185	7.28			2102	4725	2443	5492	324,0	19.76	4,23	9.33	✓
SC 1500 - 080 - B	SC 1500 - 080 - D	80	3.15	270	10.63	190	7.48			2110	4743	2455	5519	342,0	20.86	4,30	9.48	✓
-	SC 1500 - 088 - D	88	3.46	285	11.22	197	7.76			2130	4788	2486	5589	367,0	22.39	4,42	9.74	✓
SC 1500 - 100 - B	SC 1500 - 100 - D	100	3.94	310	12.20	210	8.27	1530	3440	2136	4802	2495	5609	414,0	25.25	4,60	10.14	✓
-	SC 1500 - 113 - D	113	4.45	335	13.19	222	8.74	$\pm 5\%$		2151	4836	2520	5665	459,0	28.00	4,78	10.54	✓
SC 1500 - 125 - B	SC 1500 - 125 - D	125	4.92	360	14.17	235	9.25	150 bar	2175 psi	2158	4851	2529	5685	505,0	30.81	4,97	10.96	✓
-	SC 1500 - 138 - D	138	5.43	385	15.16	247	9.72			2169	4876	2548	5728	550,0	33.55	5,16	11.38	✓
-	SC 1500 - 150 - D	150	5.91	410	16.14	260	10.24			2173	4885	2554	5742	595,0	36.30	5,35	11.79	✓
SC 1500 - 160 - B	SC 1500 - 160 - D	160	6.30	430	16.93	270	10.63	+20 °C +68 °F		2178	4896	2562	5760	631,0	38.49	5,50	12.13	✓
-	SC 1500 - 175 - D	175	6.89	460	18.11	285	11.22			2185	4912	2572	5782	685,0	41.79	5,73	12.63	✓
SC 1500 - 200 - B	SC 1500 - 200 - D	200	7.87	510	20.08	310	12.20			2198	4941	2592	5828	772,0	47.09	6,13	13.51	✓
-	SC 1500 - 225 - D	225	8.86	560	22.05	335	13.19			2219	4989	2625	5901	850,0	51.85	6,60	14.55	✓
SC 1500 - 250 - B	SC 1500 - 250 - D	250	9.84	610	24.02	360	14.17			2236	5027	2652	5962	928,0	56.61	7,08	15.61	✓
-	SC 1500 - 275 - D	275	10.83	660	22.05	385	15.16			2251	5060	2676	6016	1006,0	61.37	7,55	16.64	✓
SC 1500 - 300 - B	SC 1500 - 300 - D	300	11.81	710	27.95	410	16.14			2264	5089	2696	6061	1084,0	66.12	8,02	17.68	✓

SC SCF

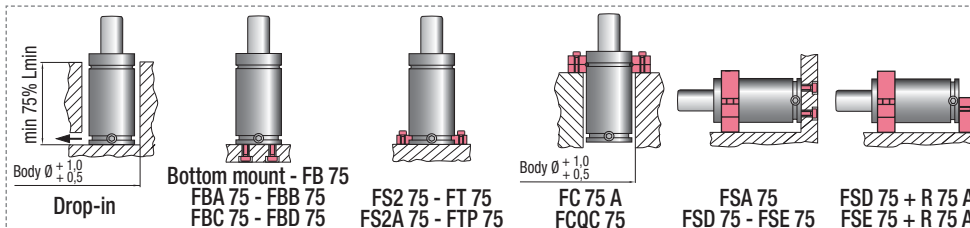

**HOW TO ORDER**

(10 pcs) SC 1500-050-D  
(10 pcs) SC 1500-050-D-N