


STANDARD D STATION METRIC STYLE

Cat. No. 5430 – Guide Unit Assembly includes:

1, 2, 4, 5, & 6

Cat. No. 5730 – Driver Assembly includes:

14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, & 25

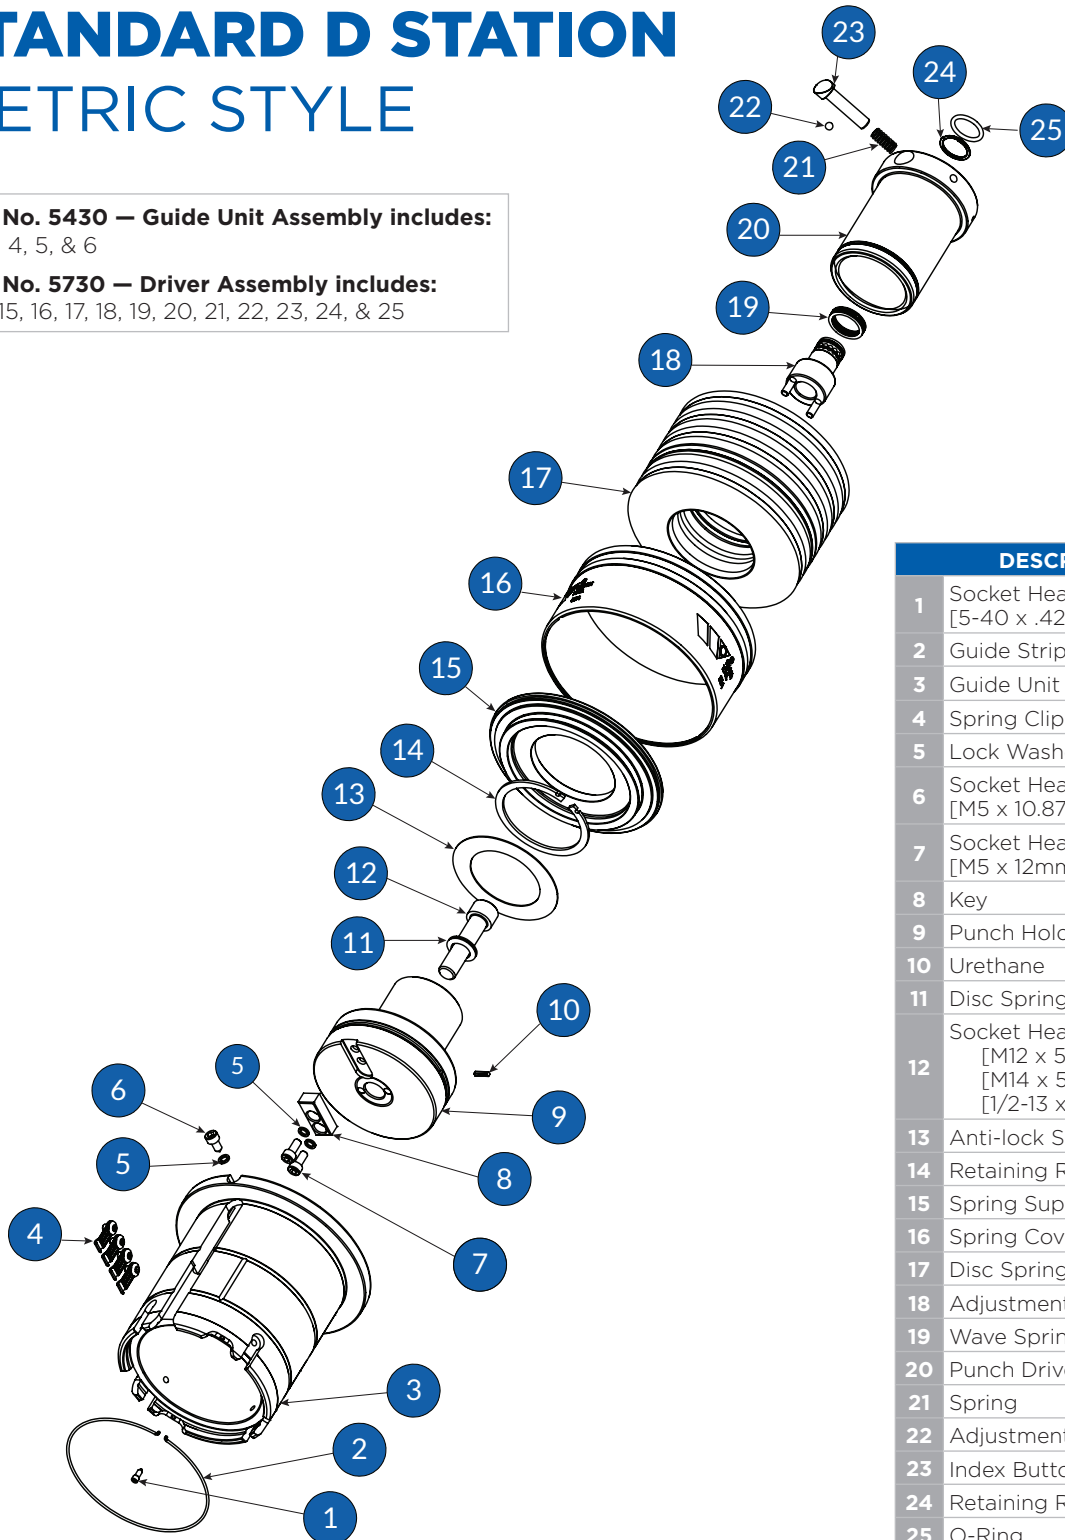

	DESCRIPTION	CAT. NO.
1	Socket Head Cap Screw [5-40 x .425"]	429
2	Guide Stripper Ring	5036
3	Guide Unit Assembly	5430
4	Spring Clip (4)	2810
5	Lock Washer	2112
6	Socket Head Cap Screw [M5 x 10.87mm]	5197
7	Socket Head Cap Screw [M5 x 12mm]	6110
8	Key	1862
9	Punch Holder	5558
10	Urethane	2020643
11	Disc Spring	971690
12	Socket Head Cap Screw (2) [M12 x 50mm] [M14 x 50mm] [1/2-13 x 2.000"]	970467 13844 6325
13	Anti-lock Shim	5413
14	Retaining Ring	5747
15	Spring Support	5738
16	Spring Cover	5423
17	Disc Spring (7 required)	5449
18	Adjustment Shaft	5739
19	Wave Spring	971692
20	Punch Driver	5740
21	Spring	972396
22	Adjustment Locking Ball	972420
23	Index Button	5737
24	Retaining Ring	972441
25	O-Ring	972430