



**EN** Medium load springs  
Blue color

**ES** Muelles carga mediana  
Color azul marino

**FR** Ressorts charge moyenne  
Couleur bleue

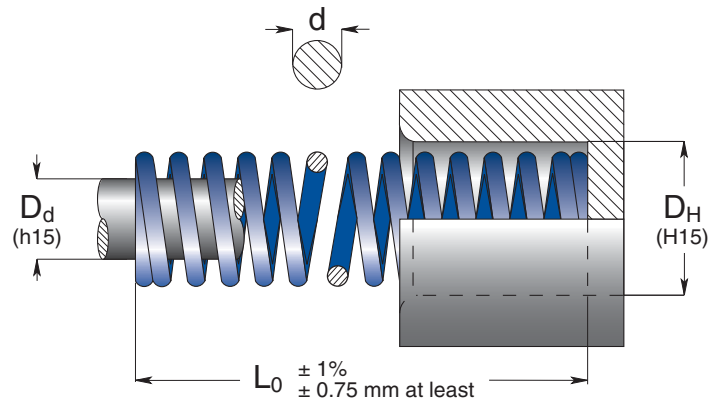

Code	D <sub>H</sub> Hole Diameter	D <sub>d</sub> Rod Diameter	L <sub>0</sub> Free Length	R Spring Constant	A		B		C		D		E	Pcs
					25% L <sub>0</sub>	30% L <sub>0</sub>	33,75% L <sub>0</sub>	37,5% L <sub>0</sub>	do not use					
	inch	inch	inch	lbs/0.1 in.	inch	lbs	inch	lbs	inch	lbs	inch	lbs	inch	
<b>TB 10 - 025</b>	3/8	3/16	1	7.0	0.25	17	0.30	21	0.33	23	0.37	26	0.41	50
<b>TB 10 - 032</b>			1 1/4	5.4	0.31	17	0.38	20	0.43	23	0.47	25	0.52	50
<b>TB 10 - 038</b>			1 1/2	4.5	0.37	17	0.45	20	0.50	23	0.56	25	0.63	50
<b>TB 10 - 044</b>			1 3/4	3.7	0.43	16	0.52	19	0.58	22	0.65	24	0.73	50
<b>TB 10 - 051</b>			2	3.2	0.50	16	0.60	19	0.68	22	0.75	24	0.83	25
<b>TB 10 - 064</b>			2 1/2	2.6	0.63	16	0.76	19	0.85	22	0.94	24	1.04	25
<b>TB 10 - 076</b>			3	2.1	0.75	16	0.90	19	1.01	21	1.12	24	1.25	25
<b>TB 10 - 305</b>	0,06	12	0.5	3.00	15	3.60	18	4.05	21	4.50	23	5.06	10	
<b>TB 13 - 025</b>	1/2	9/32	1	12.4	0.25	31	0.30	37	0.33	41	0.37	46	0.44	50
<b>TB 13 - 032</b>			1 1/4	9.6	0.31	30	0.38	36	0.43	41	0.47	45	0.55	50
<b>TB 13 - 038</b>			1 1/2	7.9	0.37	29	0.45	36	0.50	40	0.56	44	0.68	50
<b>TB 13 - 044</b>			1 3/4	6.6	0.43	29	0.52	34	0.58	39	0.65	43	0.78	25
<b>TB 13 - 051</b>			2	5.7	0.50	29	0.60	34	0.68	39	0.75	43	0.90	25
<b>TB 13 - 064</b>			2 1/2	4.5	0.63	28	0.76	34	0.85	38	0.94	42	1.12	25
<b>TB 13 - 076</b>			3	3.7	0.75	27	0.90	33	1.01	37	1.12	41	1.35	25
<b>TB 13 - 089</b>	3 1/2	3.2	0.88	28	1.05	34	1.18	38	1.31	42	1.63	20		
<b>TB 13 - 305</b>	0,07	12	0.9	3.00	27	3.60	32	4.05	35	4.50	40	5.49	10	
<b>TB 16 - 025</b>	5/8	11/32	1	18.2	0.25	45	0.30	54	0.33	61	0.37	67	0.43	50
<b>TB 16 - 032</b>			1 1/4	13.7	0.31	43	0.38	52	0.43	58	0.47	65	0.54	50
<b>TB 16 - 038</b>			1 1/2	11.1	0.37	42	0.45	50	0.50	56	0.56	62	0.65	25
<b>TB 16 - 044</b>			1 3/4	9.2	0.43	40	0.52	48	0.58	54	0.65	60	0.76	25
<b>TB 16 - 051</b>			2	7.9	0.50	40	0.60	48	0.68	53	0.75	60	0.87	25
<b>TB 16 - 064</b>			2 1/2	6.1	0.63	38	0.76	46	0.85	52	0.94	58	1.08	25
<b>TB 16 - 076</b>			3	5.0	0.75	37	0.90	45	1.01	51	1.12	56	1.30	20
<b>TB 16 - 089</b>	3 1/2	4.3	0.88	38	1.05	45	1.18	51	1.31	56	1.52	20		
<b>TB 16 - 102</b>	4	3.7	1.00	38	1.20	45	1.36	50	1.51	56	1.75	20		
<b>TB 16 - 305</b>	0,09	12	1.2	3.00	36	3.60	43	4.05	49	4.50	54	5.26	10	

Round Wire  
Inch