

RV 6600

ISO 11901 - 3	VDI 3003 - Blatt 3	B2 4005 (BMW)	075.90.60 (FCA)
W-DX35-6204 (Ford)	B8 3180 220 000 004(MB)	39D 997 (VW)	



OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

ACTIVE SAFETY

easyl MANIFOLD p. 211



OSAS

* F_{1i} = Isothermal end force at 100% Cu p. 16




** F_{1p} = Polytrophic end force at 100% Cu



USAS




OPAS

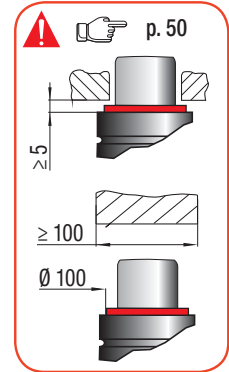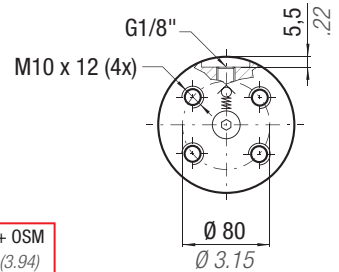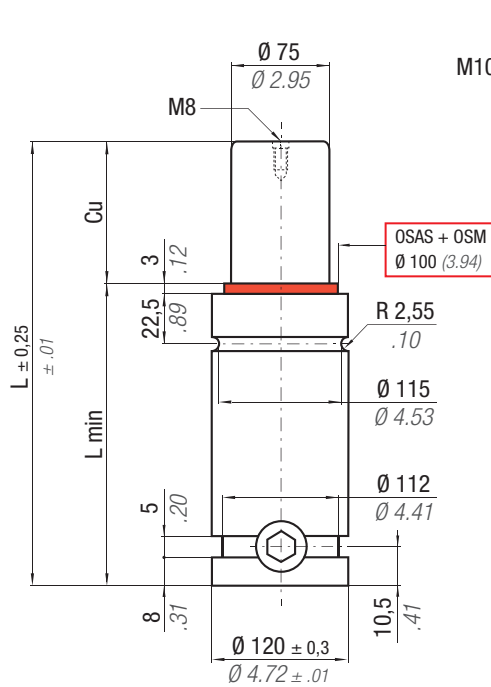

N ₂	°F 32 - 176	°C 0 - 80	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 44,18 cm ² 6.848 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit 39BMRV06600C
----------------	----------------------	--------------------	---------------------------	------------------------------	----------------------------	---	--------------------------------	----------------------	---------------------------------

CODE	Cu		L		L min		F ₀		F _{1i} *		F _{1p} **		V ₀		PED		
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	2014/68/EU
RV 6600 - 016 - A	16	0.63	100	3.94	84	3.31	6630 ± 5%	14904	9125	20515	10607	23845	300,0	18.30	5,12	11.29	✓
RV 6600 - 019 - A	19	0.75	106	4.17	87	3.43			9376	21077	10995	24718	332,0	20.25	5,23	11.53	✓
RV 6600 - 025 - A	25	0.98	118	4.65	93	3.66			9779	21985	11628	26141	396,0	24.16	5,47	12.06	✓
RV 6600 - 032 - A	32	1.26	132	5.20	100	3.94			10136	22787	12195	27415	471,0	28.73	5,75	12.68	✓
RV 6600 - 038 - A	38	1.50	144	5.67	106	4.17			10375	23325	12578	28276	535,0	32.64	5,99	13.21	✓
RV 6600 - 050 - A	50	1.97	168	6.61	118	4.65			10733	24129	13157	29578	663,0	40.44	6,47	14.26	✓
RV 6600 - 063 - A	63	2.48	194	7.64	131	5.16			11006	24743	13604	30583	801,0	48.86	6,99	15.41	✓
RV 6600 - 075 - A	75	2.95	218	8.58	143	5.63			11193	25163	13911	31273	930,0	56.73	7,47	16.47	✓
RV 6600 - 080 - A	80	3.15	228	8.98	148	5.83			11258	25308	14018	31514	983,0	59.96	7,67	16.91	✓
RV 6600 - 100 - A	100	3.94	268	10.55	168	6.61			11463	25771	14359	32280	1197,0	73.02	8,46	18.65	✓
RV 6600 - 125 - A	125	4.92	318	12.52	193	7.60	11642	26171	14656	32948	1464,0	89.30	9,46	20.86	✓		

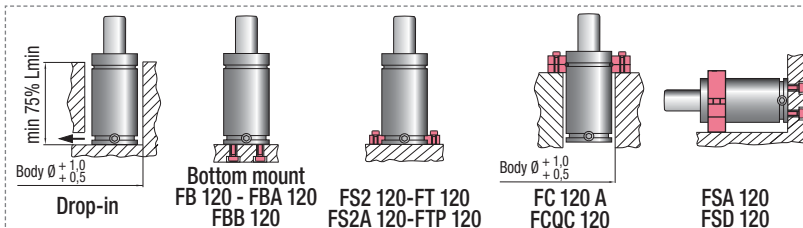

HOW TO ORDER

(10 pcs) RV 6600-050-A
(10 pcs) RV 6600-050-A-N