


ISO 11901 - 3 W-DX35-6204 (Ford)	VDI 3003 - Blatt 3 PG 24D (Mazda)	B2 4005 (BMW) B8 3180 220 000 004(MB)	075.90.60 (FCA) 39D 997 (VW)
-------------------------------------	--------------------------------------	--	---------------------------------

RV 9500



OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

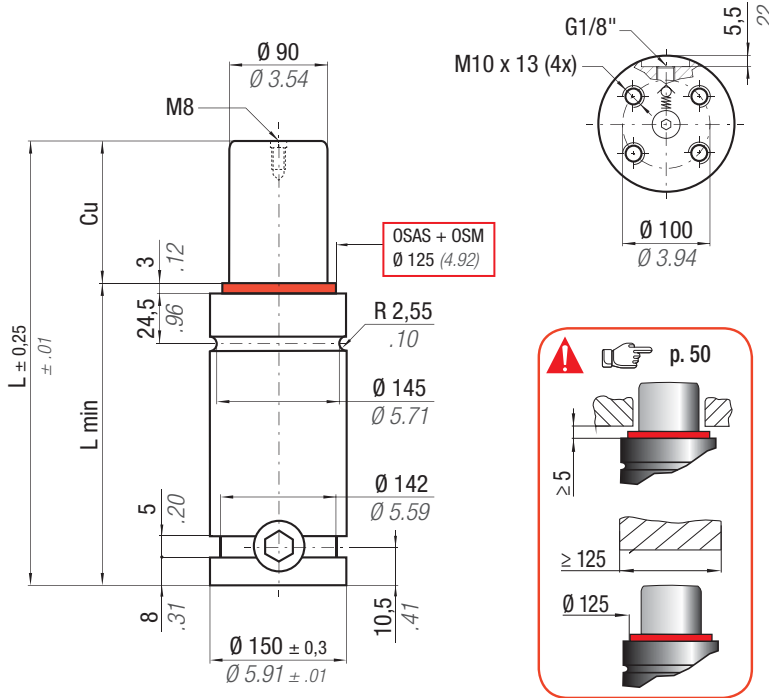

easu MANIFOLD p. 211

ACTIVE SAFETY

* F_{1i} = Isothermal end force at 100% Cu p. 16
 ** F_{1p} = Polytrophic end force at 100% Cu



OSAS



USAS




OPAS

RV

	°F 32 - 176 °C 0 - 80	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 63,62 cm ² 9.864 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit 39BMRV09500C
--	--------------------------	---------------------------	-------------------------------------	-----------------------------------	--	---------------------------------------	-----------------------------	--

CODE	Cu		L		L min		F ₀ Initial force		F _{1i} * End force		F _{1p} ** End force		V ₀		PED 2014/68/EU		
	mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	
RV 9500 - 019 - A	19	0.75	116	4.57	97	3.82			13101	29453	15214	34202	517,0	31.54	9,56	21.08	✓
RV 9500 - 025 - A	25	0.98	128	5.04	103	4.06			13637	30656	16044	36068	614,0	37.45	9,93	21.89	✓
RV 9500 - 032 - A	32	1.26	142	5.59	110	4.33	9540	21446	14112	31726	16792	37750	727,0	44.35	10,37	22.86	✓
RV 9500 - 038 - A	38	1.50	154	6.06	116	4.57	± 5%		14432	32445	17299	38890	823,0	50.20	10,74	23.68	✓
RV 9500 - 050 - A	50	1.97	178	7.01	128	5.04			14914	33528	18070	40623	1017,0	62.04	11,49	25.33	✓
RV 9500 - 063 - A	63	2.48	204	8.03	141	5.55	150 bar	2175 psi	15283	34358	18666	41963	1226,0	74.79	12,30	27.12	✓
RV 9500 - 075 - A	75	2.95	228	8.98	153	6.02			15536	34927	19078	42889	1420,0	86.62	13,05	28.77	✓
RV 9500 - 080 - A	80	3.15	238	9.37	158	6.22	+ 20 °C	+ 68 °F	15625	35125	19222	43213	1500,0	91.50	13,37	29.48	✓
RV 9500 - 100 - A	100	3.94	278	10.94	178	7.01			15905	35756	19681	44245	1823,0	111.20	14,61	32.21	✓
RV 9500 - 125 - A	125	4.92	328	12.91	203	7.99			16148	36303	20082	45146	2226,0	135.79	16,18	35.67	✓

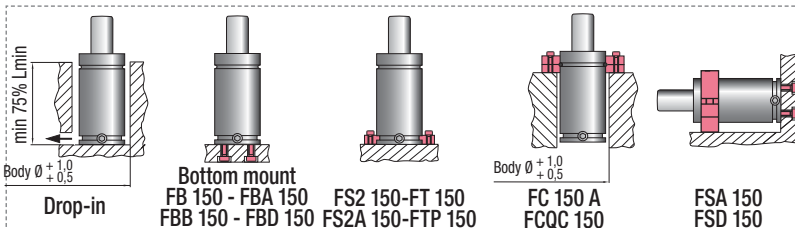

HOW TO ORDER

(10 pcs) RV 9500-050-A
 (10 pcs) RV 9500-050-A-N